

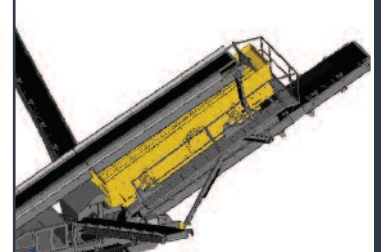


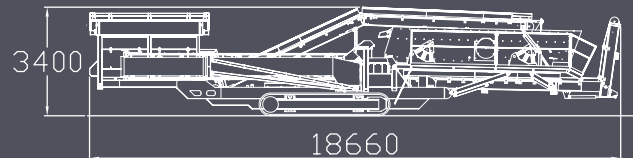


MS2600
Tracked Screen

TESAB
GROUP

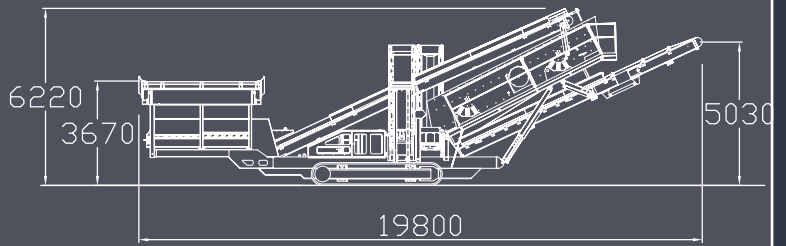

Built for Power. Engineered to Last.

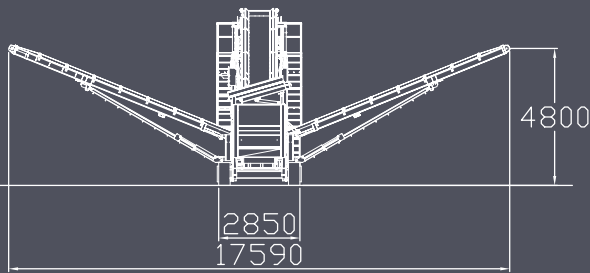

OVERALL PLANT DIMENSIONS:

Operating Length: 19800mm
 Operating Height: 6220mm
 Operating Width: 17590mm
 Transport Length: 18660mm
 Transport Height: 3400mm
 Transport Width: 3000mm
 Transport Weight: 36,500kgs
 Fines Conveyor Feed Out: 5030mm
 Side Product Conveyors Feed Out: 4800mm
 Feed Belt Width: 1000mm
 Side Product Belt Widths: 650mm
 Fines Belt Width: 1200mm
 Hopper Capacity: 8yd³

FEATURES AND BENEFITS:

Cat C4.4 Tier III (130hp) Powerpack
 6000 x 1500 mm (20 x 5) Double Deck Screen
 Adjustable Screenbox Angle
 Heavy Duty Steel Construction
 250+ ton per hour
 Quick and Easy Setup Up Time
 Highly Efficient Screen Action
 Manoeuvrable, flexible , Versatile
 Easily integrates into existing Setup
 Various Options Available – wheeled, live head ,
 various mesh sizes

TESAB ENGINEERING LTD.

Gortrush Ind Est | Omagh | Co.Tyrone | N.Ireland | BT78 5EJ

Tel: 0044 (0)28 8225 2781 | Fax: 0044 (0)28 8225 2801

Email: sales@tesab.com | Web: www.tesab.com



See also Impactor Ranger 1012T / 1412T / 623CT / 1012S / 623S. Jaw Range 10570 / 10580. Trackstack Range and Screen Range.

Important Note:

Please note that these are liable/subject to change due to machine specifications and developments, this information has been supplied based on the information to date.